




●特点 Features:

- 1、耐热性好、温度系数小、噪声低、负荷功率大、绝缘性高。Good heat-durability, low temperature coefficient, low noise, high load power, high insulating capacity.
- 2、使用环境温度 Operating ambient temperature: -55°C~+275°C。
- 3、阻值误差 Resistance tolerance: ±1%、±2%、±5%、±10%。

●标识含义 Mark Meaning:

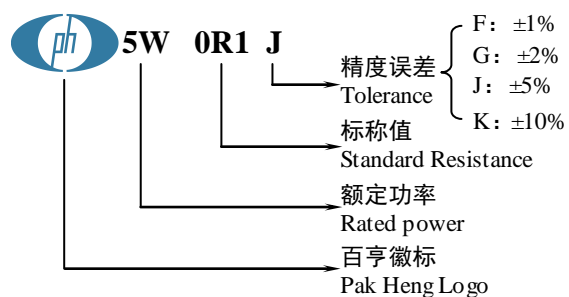


●产品结构图 Structural Drawing:

| | |
|--------------------|--|
| <p>SQP:</p> | <p>A、填充料 Padding materials B、镀锡铜线 Tinned copper lead wire C、瓷壳 Ceramic shell D、玻璃纤维或陶瓷基体或电阻膜层 Fiberglass or ceramic core or resistors film E、电阻丝或陶瓷基体 Resistance wire or ceramic core F、铁帽 Iron cap</p> |
| <p>SQZ:</p> | <p>A、端子 Terminal B、填充料 Padding materials C、瓷壳 Ceramic shell D、电阻丝或陶瓷基体 Resistance wire or ceramic core E、玻璃纤维或陶瓷基体或电阻膜层 Fiberglass or ceramic core or resistors film</p> |
| <p>SQM:</p> | <p>A、填充料 Padding materials B、瓷壳 Ceramic shell C、电阻丝或陶瓷基体 Resistance wire or ceramic core D、玻璃纤维或陶瓷基体或电阻膜层 Fiberglass or ceramic core or resistors film E、铁帽 Iron cap F、镀锡铜线 Tinned copper lead wire</p> |


●规格尺寸及阻值范围 Dimensions and Resistance Range:

●SQP:

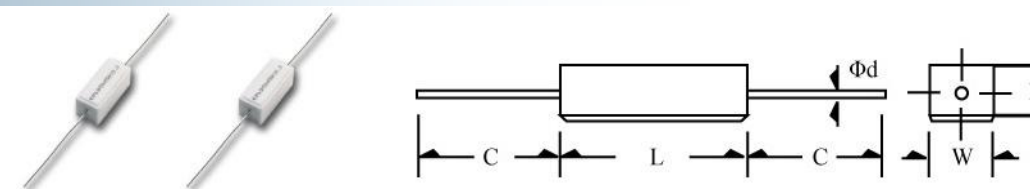


| 料号 Part No. | 功率 Power | 尺寸 Dimensions(mm) | | | | | 阻值范围 Resistance range | | | |
|---------------------|-------------|-------------------|------|------|------|--------|-----------------------|---------|-----------|---------|
| | | L±.5 | W± | H± | C±3 | d±0.05 | RXR | BRX | HRX | NRX |
| RXR01B(HRX/NRX) | 1W | 14.0 | 6.5 | 5.5 | 23.0 | 0.62 | 0.1R~100R | | 100R~100K | 0R2~2R7 |
| RXR02B(HRX/NRX) | 2W | 18.0 | 7.0 | 7.5 | 21.0 | 0.75 | 0.1R~820R | | 220R~100K | 0R1~10R |
| RXR03B(BRX/HRX/NRX) | 3W | 22.0 | 8.0 | 8.0 | 35.0 | 0.75 | 0.1R~3K3 | 1R~120R | 100R~100K | 0R1~27R |
| RXR04B(BRX/HRX/NRX) | 4W | 22.0 | 8.0 | 8.0 | 35.0 | 0.75 | 0.1R~3K3 | 1R~120R | 100R~100K | 0R1~27R |
| RXR05B(BRX/HRX/NRX) | 5W | 22.0 | 10.0 | 9.0 | 35.0 | 0.75 | 0.1R~3K3 | 1R~120R | 100R~100K | 0R1~27R |
| RXR06B(BRX/HRX/NRX) | 6W | 35.0 | 10.0 | 9.0 | 35.0 | 0.75 | 0.1R~7K5 | 1R~390R | 820R~100K | 0R2~39R |
| RXR07B(BRX/HRX/NRX) | 7W | 35.0 | 10.0 | 9.0 | 35.0 | 0.75 | 0.1R~7K5 | 1R~390R | 820R~100K | 0R2~39R |
| RXR08B(BRX/HRX/NRX) | 8W | 35.0 | 10.0 | 9.0 | 35.0 | 0.75 | 0.1R~7K5 | 1R~390R | 820R~100K | 0R2~39R |
| RXR09B(BRX/HRX/NRX) | 9W | 48.0 | 10.0 | 9.0 | 33.0 | 0.75 | 0.1R~12K | 1R~470R | 1K~100K | 0R2~47R |
| RXR10B(BRX/HRX/NRX) | 10W | 48.0 | 10.0 | 9.0 | 33.0 | 0.75 | 0.1R~12K | 1R~470R | 1K~100K | 0R2~47R |
| RXR11B(BRX/HRX/NRX) | 11W | 48.0 | 10.0 | 9.0 | 33.0 | 0.75 | 0.1R~12K | 1R~470R | 1K~100K | 0R2~47R |
| RXR15B(BRX/NRX) | 15W | 48.0 | 12.5 | 11.5 | 33.0 | 0.75 | 0.2R~18K | 1R~560R | | 0R2~56R |
| RXR17B(BRX/NRX) | 17W | 60.0 | 14.0 | 13.5 | 33.0 | 0.75 | 0.2R~30K | 1R~620R | | 0R2~68R |
| RXR20B/25B(BRX/NRX) | 20W~25W | 60.0 | 14.0 | 13.5 | 33.0 | 0.75 | 0.2R~30K | 1R~620R | | 0R2~68R |
| RXR30B/40B(HRX) | 30W~40W | 89.0 | 19.0 | 19.0 | 23.0 | 0.75 | 0.2R~30K | | 1K~100K | |

●BH:

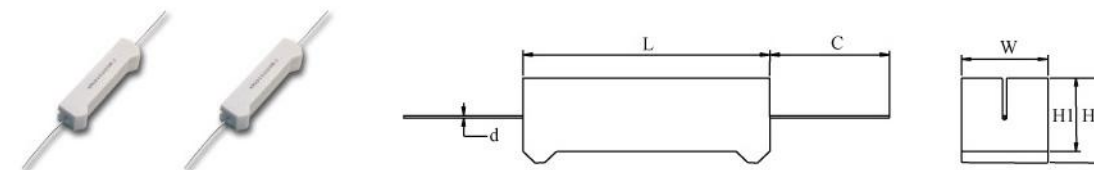

| 料号 Part No. | 功率 Power | 尺寸 Dimensions(mm) | | | | | | 阻值范围 Resistance range | | | |
|---------------------|-------------|-------------------|------|------|------|------|--------|-----------------------|---------|-----------|---------|
| | | L±.5 | W± | H1± | H2± | C±3 | d±0.05 | RXR | BRX | HRX | NRX |
| RXR05B(BRX/HRX/NRX) | 5W | 22.0 | 10.0 | 9.5 | 10.5 | 35.0 | 0.75 | 0R1~3K3 | 1R~120R | 100R~100K | 0R1~27R |
| RXR06B(BRX/HRX/NRX) | 6W | 35.0 | 10.0 | 10.0 | 11.5 | 35.0 | 0.75 | 0R1~7K5 | 1R~390R | 820R~100K | 0R2~39R |
| RXR07B(BRX/HRX/NRX) | 7W | 35.0 | 10.0 | 10.0 | 11.5 | 35.0 | 0.75 | 0R1~7K5 | 1R~390R | 820R~100K | 0R2~39R |
| RXR08B(BRX/HRX/NRX) | 8W | 35.0 | 10.0 | 10.0 | 11.5 | 35.0 | 0.75 | 0R1~7K5 | 1R~390R | 820R~100K | 0R2~39R |
| RXR09B(BRX/HRX/NRX) | 9W | 48.0 | 10.5 | 10.0 | 12.5 | 33.0 | 0.75 | 0R1~12K | 1R~470R | 1K~100K | 0R2~47R |
| RXR10B(BRX/HRX/NRX) | 10W | 48.0 | 10.0 | 10.0 | 12.5 | 33.0 | 0.75 | 0R1~12K | 1R~470R | 1K~100K | 0R2~47R |
| RXR11B(BRX/HRX/NRX) | 11W | 48.0 | 10.0 | 10.0 | 12.5 | 33.0 | 0.75 | 0R1~12K | 1R~470R | 1K~100K | 0R2~47R |
| RXR15B(BRX/NRX) | 15W | 48.0 | 12.5 | 13.5 | 17.0 | 33.0 | 0.75 | 0R2~18K | 1R~560R | | 0R2~56R |
| RXR17B(BRX/NRX) | 17W | 59.0 | 14.0 | 13.5 | 17.0 | 33.0 | 0.75 | 0R2~30K | 1R~620R | | 0R2~68R |
| RXR20B(BRX/NRX) | 20W | 59.0 | 14.0 | 13.5 | 17.0 | 33.0 | 0.75 | 0R2~30K | 1R~620R | | 0R2~68R |
| RXR25B(BRX/NRX) | 25W | 59.0 | 14.0 | 13.5 | 17.0 | 33.0 | 0.75 | 0R2~30K | 1R~620R | | 0R2~68R |

●SQZ:

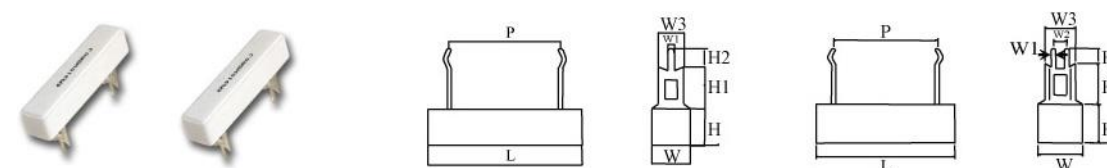

| 料号 Part No. | 功率 Power | 尺寸 Dimensions(mm) | | | | | | | | | 阻值范围 Resistance range | | | | |
|---------------------|-------------|-------------------|------|------|------|-----|-------|-------|-------|-------|-----------------------|---------|---------|-----------|---------|
| | | L±.5 | W± | H± | P±.5 | H1± | H2±.5 | W1±.5 | W2±.5 | W3±.5 | RXR | BRX | HRX | NRX | |
| BXR03B(NRX) | 3W | 24.0 | 9.0 | 9.0 | 100 | 105 | 4.5 | 1.5 | 5.0 | 7.0 | | 1R~120R | | | 0R1~27R |
| BXR04B(NRX) | 4W | 24.0 | 9.0 | 9.0 | 100 | 105 | 4.5 | 1.5 | 5.0 | 7.0 | | 1R~120R | | | 0R1~27R |
| RXR05B(BRX/HRX/NRX) | 5W | 28.0 | 10.0 | 10.0 | 150 | 105 | 4.5 | 1.5 | 5.0 | 7.0 | | 0R1~6K2 | 1R~330R | 560R~100K | 0R1~33R |
| RXR06B(BRX/HRX/NRX) | 6W | 28.0 | 10.0 | 10.0 | 150 | 105 | 4.5 | 1.5 | 5.0 | 7.0 | | 0R1~6K2 | 1R~330R | 560R~100K | 0R1~33R |
| RXR07B(BRX/HRX/NRX) | 7W | 36.0 | 10.0 | 10.0 | 200 | 105 | 4.5 | 1.5 | 5.0 | 7.0 | | 0R1~7K5 | 1R~390R | 820R~100K | 0R2~39R |
| RXR08B(BRX/HRX/NRX) | 8W | 36.0 | 10.0 | 10.0 | 200 | 105 | 4.5 | 1.5 | 5.0 | 7.0 | | 0R1~7K5 | 1R~330R | 820R~100K | 0R2~39R |
| RXR09B(BRX/HRX/NRX) | 9W | 48.0 | 10.0 | 10.0 | 300 | 105 | 4.5 | 1.5 | 5.0 | 7.0 | | 0R1~12K | 1R~470R | 1K~100K | 0R2~47R |
| RXR10B(BRX/HRX/NRX) | 10W | 48.0 | 10.0 | 10.0 | 300 | 105 | 4.5 | 1.5 | 5.0 | 7.0 | | 0R1~12K | 1R~470R | 1K~100K | 0R2~47R |
| RXR11B(BRX/HRX/NRX) | 11W | 48.0 | 10.0 | 10.0 | 300 | 105 | 4.5 | 1.5 | 5.0 | 7.0 | | 0R1~12K | 1R~470R | 1K~100K | 0R2~47R |
| RXR15B(BRX/NRX) | 15W | 48.0 | 12.5 | 12.0 | 300 | 300 | 4.5 | 3.0 | 8.0 | 10.0 | | 0R1~18K | 1R~560R | | 0R2~56R |
| RXR20B(BRX/NRX) | 20W | 60.0 | 15.0 | 13.0 | 420 | 300 | 4.5 | 3.0 | 8.0 | 10.0 | | 0R1~20K | 1R~620R | | 0R2~68R |
| RXR25B(BRX/NRX) | 25W | 60.0 | 15.0 | 13.0 | 420 | 300 | 4.5 | 3.0 | 8.0 | 10.0 | | 0R1~20K | 1R~620R | | 0R2~68R |

水泥类 CEMENT RESISTORS

水泥类 CEMENT RESISTORS